


LOC/DME I-VMU 108.7 Chan 24	APP CRS 269°	Rwy Idg TDZE Apt Elev	6001 1058 1079
---	------------------------	-----------------------------	---

ILS or LOC RWY 27
MENA INTERMOUNTAIN MUNI (MEZ)

NA When local altimeter setting not received, use Fort Smith Rgnl altimeter setting and increase DA 197 feet, all MDAs 200 feet, increase S-ILS 27 visibilities ½ mile, S-LOC 27 Cat B visibility ¼ mile Cat C visibility ¼ mile and circling Cat A/B ¼ mile. VDP NA when Fort Smith Rgnl altimeter setting. ADF Required.



MISSED APPROACH: Climb to 1500 then climbing right turn to 3600 direct FENCH LOM/I-VMU 6.9 DME and hold.

AWOS-3 118.025	MEMPHIS CENTER 126.1 269.0	UNICOM 122.8 (CTAF)
--------------------------	--------------------------------------	-------------------------------

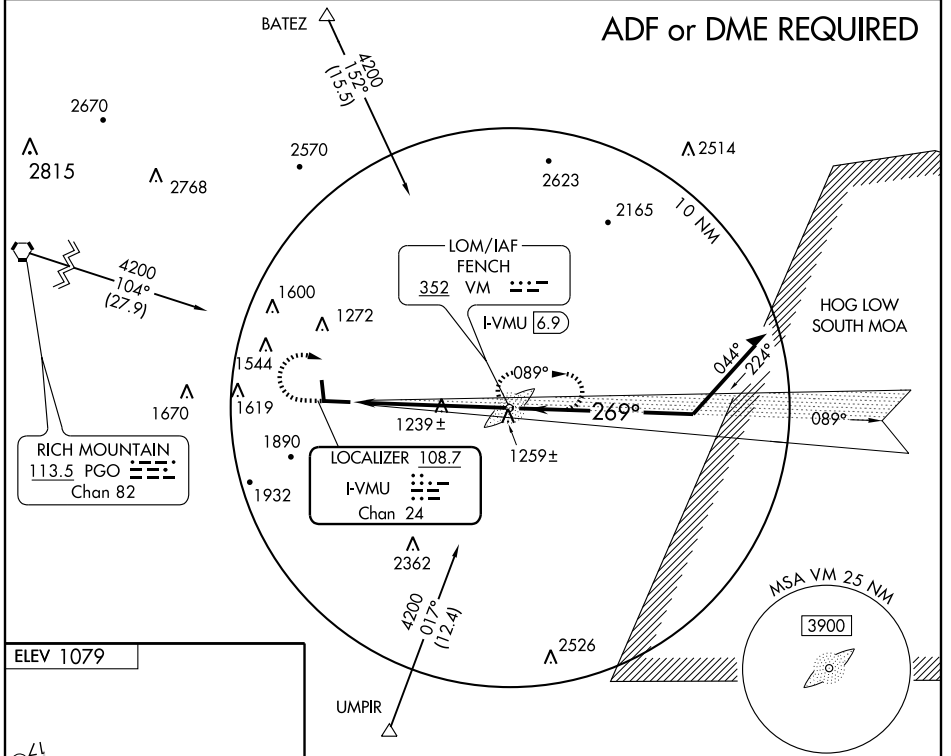

SC-1, 25 SEP 2008 to 23 OCT 2008

SC-1, 25 SEP 2008 to 23 OCT 2008

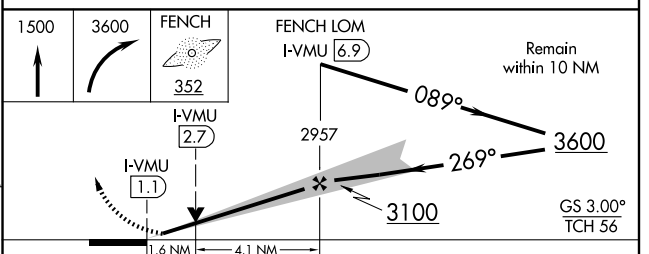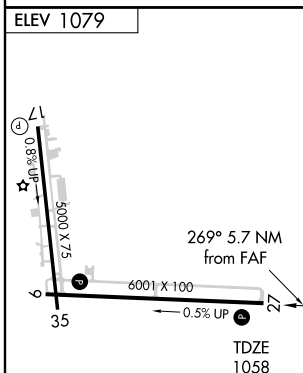

REIL Rwy 35
MIRL Rwy 17-35
HIRL Rwy 9-27

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

CATEGORY	A	B	C	D
S-ILS 27	1458-1½	400 (400-½)		NA
S-LOC 27	1600-1	542 (600-1)	1600-1½ 542 (600-1½)	NA
CIRCLING	1880-1 801 (900-1)	1940-1¼ 861 (900-1¼)	2060-3 981 (1000-3)	NA